

Features

Up to three RTD inputs 1mA analogue output Three adjustable set points Internal differential LED trip indication Automatic reset Three single-pole relay contacts

Benefits

Temperature monitoring Unbalanced supply protection Sustained overload protection Single-phasing protection Blocked ventilation protection Protection against ineffective cooling Protection of bearing temperature

Applications

Switchgear Distribution systems Generator sets Control panels Process control Motor monitoring Transformers Overload protection

250 Series DIN-rail and Wall Mounted Relays

Hot Spot 3 Temperature Relay

The Hot Spot 3 relay accepts up to three inputs from resistance temperature detectors (RTD) and provides up to three user adjustable trip points which can be used to initiate alarms, cooling systems or shutdown. The relay is ideally suited for the protection of electric motor windings, transformers, generator windings and bearing temperature. The analogue output can be used for remote monitoring of high temperatures.

Crompton

Operation

RTD temperature sensors are often fitted inside electric motors to detect hot spots in the windings or the bearings. RTD sensors are popular because they offer a good accuracy for a reasonable price. The same sensors can be used inside transformers, generator sets, gas turbines or as part of a process control system. Hot spots can be caused by many conditions such as overloads, over-voltage, unbalanced supply, worn bearings, ineffective cooling, poor ventilation, shorted turns, insulation breakdown, single phasing etc..

The Hot Spot 3 protector continuously monitors the three RTD temperature sensors and offers up to three user adjustable set points and relay contacts. These can be used to raise alarms, switch on cooling systems or shut down the affected equipment. The highest temperature is indicated with a yellow LED and can be accurately measured or remotely displayed using the 0/1mA analogue output signal.

The temperature is compared with the user adjustable set points. When the measured temperature exceeds the set point, the relay will de-energise and a red LED will illuminate to indicate the trip condition. When the temperature drops below the set point, the relay will reset to the energised condition and the LED will extinguish. The range consists of three product models which offers one, two or three adjustable set points.

Product Codes

Relay	Protection	ANSI no.	Cat. no.
3 RTD inputs	3 set points	49	256-PRA
3 RTD inputs	2 set points	49	256-PRB
3 RTD inputs	1 set point	49	256-PRC

When ordering please supply the following information:

- System voltage, frequency and required options.
- The type of temperature sensor being used, e.g. Platinum PT100.
- The maximum temperature or meter scale, e.g. 100% = 1mA = 150°C.
 - The set point adjustment range, e.g. 0°C to 150°C.

see 2nd page for selection


SEE ATTACHED FOR PART NUMBERS

Specification - Hot Spot 3 Temperature Relay

Up to 3 resistance temperature detectors (RTD). Either 10 Ω copper or 100 Ω platinum minimum span 100°C				
AC: 110V, 120V, 220V, 230V, or 240V ±20% DC: Consult factory				
50/60Hz				
1.2 x rating continuously				
0.5% of full span				
Pre-set at 2% of range				
100V, 110V, 120V, 208V, 220V, 240V, 480V, ±20%				
12V, 24V, 48V, 110V or 125V, ±20%. Including ripple				
4VA (max)				
1mA into 0/4k Ω load				
1-pole change over				
AC: 240V 5A, non inductive DC: 24V 5A resistive				
0.2 million operations at rated loads				
Automatic				
0°C to +60°C (0°C to +40°C for UL models)				
-20°C to +70°C				
0.05% per °C				
Electrical stress surge withstand and non-function to ANSI/IEEE C37 90a				
DIN-rail with wall mounting facility				
Flame retardant polycarbonate/ABS				
IP50				
150mm (5.9") wide x 70mm (2.8") high x 112mm (4.4") deep				
1.0Kg approx.				


Dimensions

Model 256

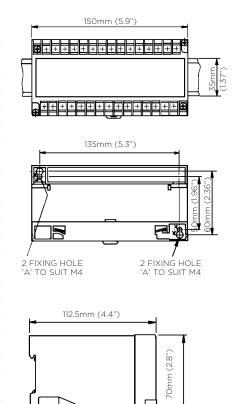

RELEASE CLIP

SEE ATTACHED FOR PART NUMBERS

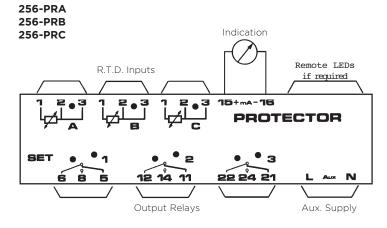

Connections



250 Series DIN-rail and Wall Mounted Relays

Hot Spot 3 Temperature Relay

RELAY	PROTECTION	INPUT	AUXILIARY	DEG	PART NUMBER
3 RTD inputs	3 set points	10 OHM COPPER	120 V AC	0-200 DEG C	256-PRAU-R1BX-DG-RO-LI
3 RTD inputs	3 set points	100 OHM PLATINUM	24 V DC	0-200 DEG C	256-PRAU-R2BX-BD-RO-LI
3 RTD inputs	3 set points	100 OHM PLATINUM	120 V AC	0-200 DEG C	256-PRAU-R2BX-DG-RO-LI
3 RTD inputs	3 set points	100 OHM PLATINUM	240 V AC	0-200 DEG C	256-PRAU-R2BX-DN-RO-LI
3 RTD inputs	2 set points	100 OHM PLATINUM	120 V AC	0-200 DEG C	256-PRBU-R2BX-DG-RO-LI
3 RTD inputs	1 set point	100 OHM PLATINUM	120 V AC	0-200 DEG C	256-PRCU-R2BX-DG-RO-LI