

Models 595 & 596

Zero Sequence Current Transformers
Window Sizes 4.56" x 13.44", 4.56" x 17.63"



Application

Zero-Sequence

Frequency

50-400 Hz.

Insulation Level

600 Volts, 10 kV BIL full wave.

Continuous Thermal Current Rating Factor

2.0 at 30 °C. amb.,
2.0 at 55 °C. amb.

Terminals are brass screws No. 8-32 with lockwashers.

4 holes mounting system also available with brackets. Consult factory for details.

Approximate weight 24-29 lbs.






Cast Resin Construction

Models 595 & 596


Catalog Number	Current Ratio	Secondary Winding Resistance (Ω @ 75 °C)
595-102-1	1,000:1	7.52
596-102-1	1,000:1	7.52

Model 595 & 596 Cast Resin Construction

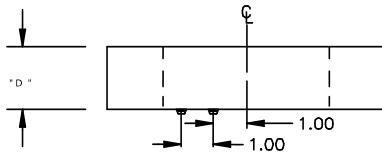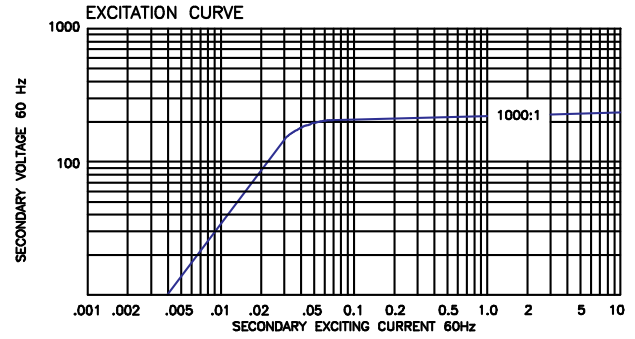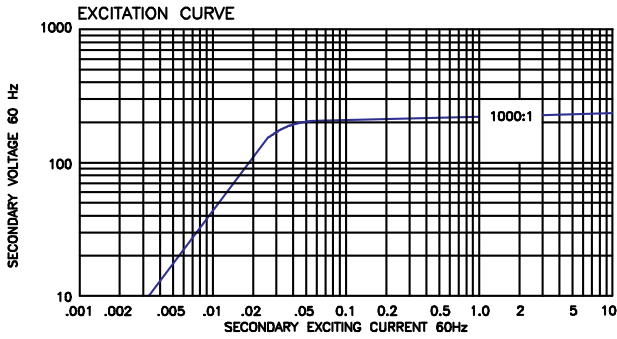

(4) HOLES \varnothing 0.55 DIA - MODEL 595

(4) HOLES \varnothing 0.41 DIA - MODEL 596

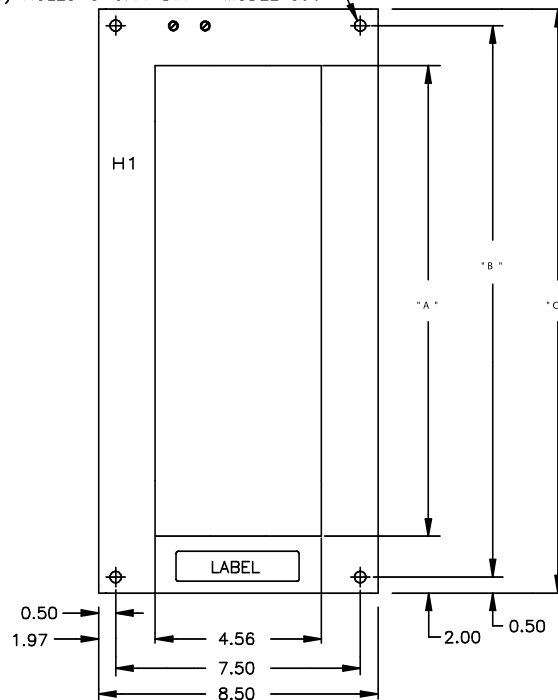

Models 595 & 596

Model	"A"	"B"	"C"	"D"
595	13.44	16.50	17.50	2.00
596	17.63	20.63	21.63	2.13

