Current Transformer

Model 112MR
Rev 02262026

APPLICATION:
Relaying


FREQUENCY:
50-400 Hz.

INSULATION LEVEL:
600 Volts. 10 k V BIL. full wave

WINDOW DIAMETER:
2.25

APPROXIMATE WEIGHT:
25 lbs

CONNECTIONS:
Terminals are brass studs No. 8–32 UNC with one flat washer, lockwasher, and regular nut
Mounting kit # 115-KIT



Model	112MR
Window Size	2.25
Width	7.00
Height	7.12
Depth	4.00

MODEL 112MR
Window Diameter 2.25”
Approximate weight: 25 lbs.

112-122MR


112-601MR


CERTIFICATIONS:

E228202

223647


ISO 9001
QUALITY MANAGEMENT

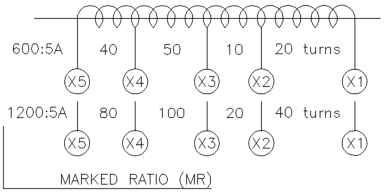


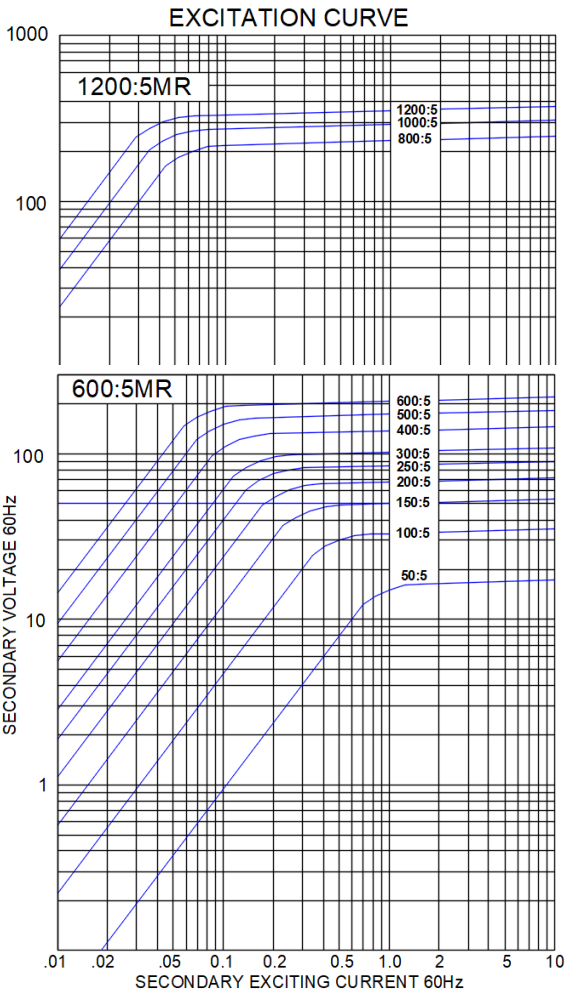

RATIO	TAP
800:5	X1-X4
1000:5	X2-X5
1200:5	X1-X5
RATIO	DCR OHMS @75°C
800:5	0.529
1000:5	0.661
1200:5	0.793

RATIO	TAP
50:5	X2-X3
100:5	X1-X2
150:5	X1-X3
200:5	X4-X5
250:5	X3-X4
300:5	X2-X4
400:5	X1-X4
500:5	X2-X5
600:5	X1-X5
RATIO	DCR OHMS @75°C
50:5	0.029
100:5	0.062
150:5	0.093
200:5	0.124
250:5	0.155
300:5	0.186
400:5	0.248
500:5	0.341
600:5	0.409

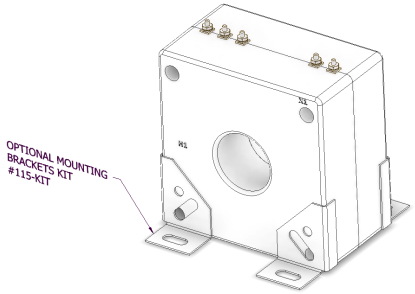

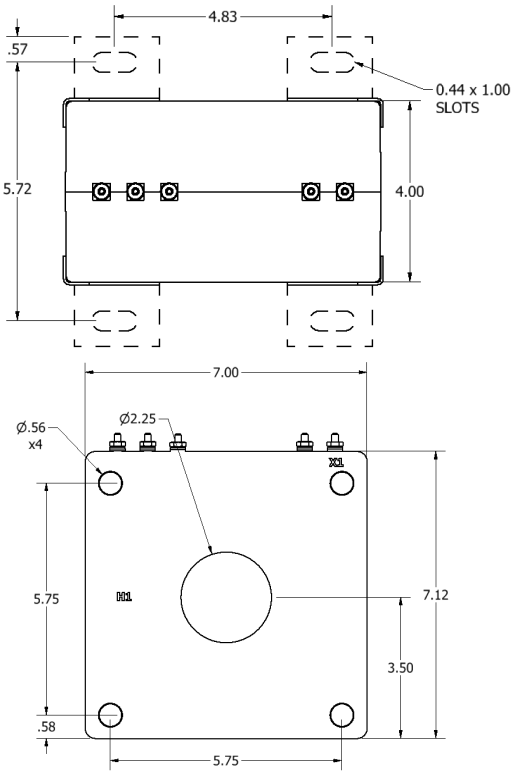

Products are manufactured in a plant whose quality management system has been certified to be in compliance with ISO 9001:2015 by NQA