
Current Transformer

Model 140MR
rev 12162025



APPLICATION:
Relaying and metering

FREQUENCY:
50-400 Hz.

INSULATION LEVEL:
600 Volts. 10 kV BIL. full wave

WINDOW DIAMETER:
8.13”

APPROXIMATE WEIGHT:
22 lbs.

CONNECTIONS:
-Terminals are brass screws No. 10-32 UNF with one flat washer and a split lock washer
-Mounting Kit – #110-KIT

Model	140MR
Window Size	8.13
Width	11.10
Height	11.47
Depth	3.00

CERTIFICATIONS:


E228202


223647


ISO 9001 QUALITY MANAGEMENT

MODEL 140MR
Window Diameter 8.13”
Approximate weight: 22 lbs.

Catalog Number	Relay Class	Continuous Thermal	
		@ 30°C	@ 50°C
140-601MR	C50	2.0	2.0
140-122MR	C100	1.5	1.5
140-202MR	C100	1.33	1.0
140-302MR	C100	1.0	0.8
140-402MR	C100	1.0	0.8
140-502MR	C50	1.0	0.8

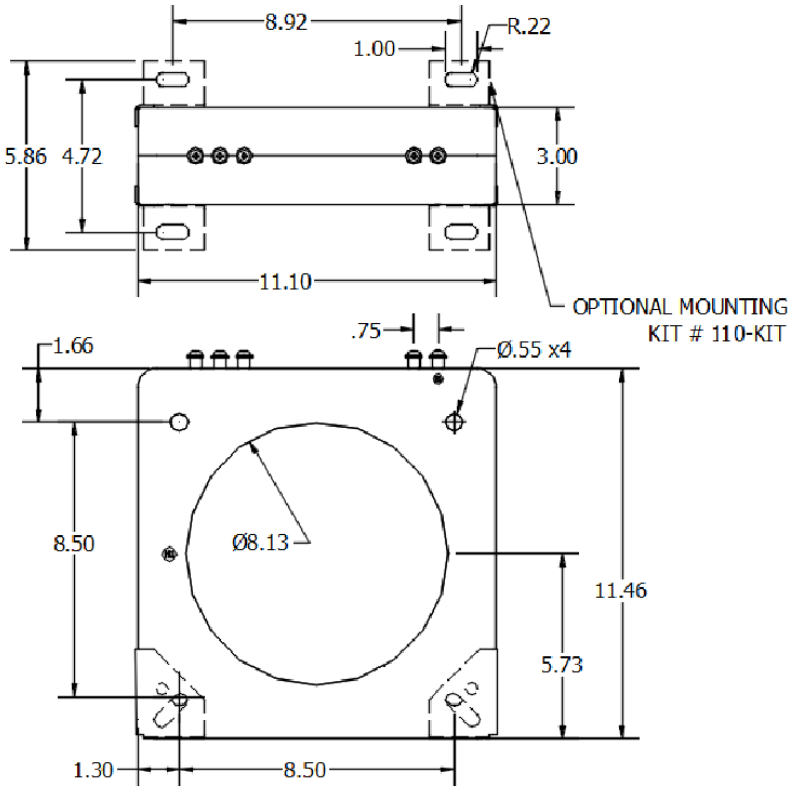

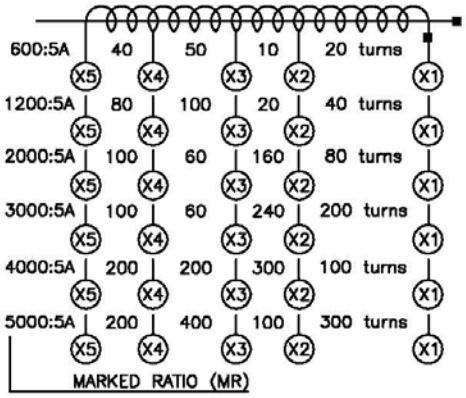



Products are manufactured in a plant whose quality management system has been certified to be in compliance with ISO 9001:2015 by NQA