Current Transformer

Model 5SHT-0.333 / 5SFT-0.333 rev 080725

APPLICATION:
With ammeters, wattmeters and cross current compensation

FREQUENCY:
50-400 Hz.


INSULATION LEVEL:
600 Volts. 10 kV BIL. full wave

WINDOW DIAMETER:
1.56”

APPROXIMATE WEIGHT:
1.0 lbs.

CONNECTIONS:
-Flexible Leads are UL 1015 105°C, CSA approved
#16AWG, 24” long
-Non-standard length to be specified
-Terminals are brass studs No. 8-32 UNC with one flat washer, lock washer, and regular nut
-Mounting bracket Part #5SHT-KIT





CERTIFICATIONS:

E228202


223647

ISO 9001 QUALITY MANAGEMENT


Model	5SHT	5SFT
Window Size	1.56	1.56
Width	3.53	3.53
Height	3.65	3.78
Depth	1.09	2.15

MODEL 5**
Window Diameter 1.56”
Approximate weight: 1.0 lbs.


CATALOG NUMBER	CURRENT VOLTAGE RATIO
5**201-0.333	200:0.333
5**251-0.333	250:0.333
5**301-0.333	300:0.333
5**401-0.333	400:0.333
5**501-0.333	500:0.333
5**601-0.333	600:0.333
5**751-0.333	750:0.333
5**801-0.333	800:0.333
5**102-0.333	1000:0.333
5**122-0.333	1200:0.333




5SHT



5SFT

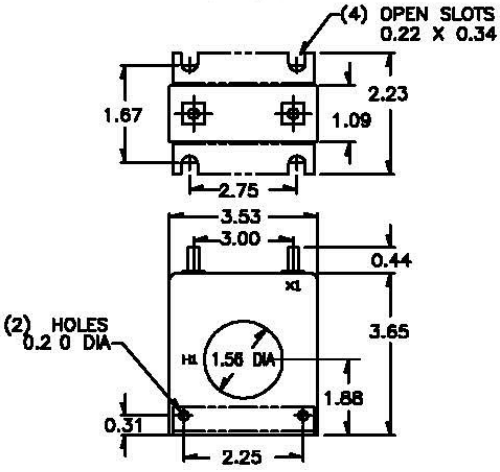

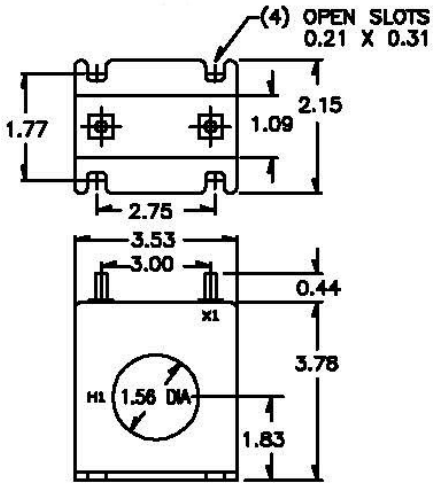

Products are manufactured in a plant whose quality management system has been certified to be in compliance with ISO 9001:2015 by NQA