
Control Power Transformer

Model CPT3-60-1.5
rev 11132025

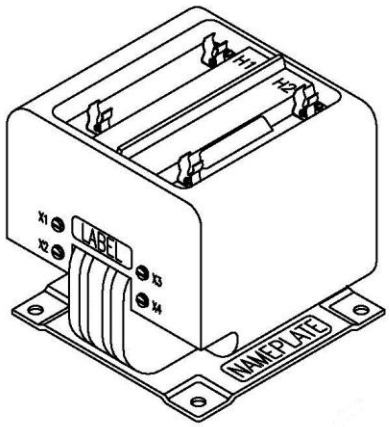

CERTIFICATIONS:

c UL us
E196363

nqa.
ISO 9001
QUALITY MANAGEMENT

APPLICATION:
To provide control power in distribution equipment and motor starters

FREQUENCY:
See below


INSULATION LEVEL:
5 kV, 60 kV BIL. full wave


THERMAL RATING:
1.5 kVA at 30°C. amb.


APPROXIMATE WEIGHT:
54 lbs.

- Primary terminals are brass screws No. 10-32 with one flat washer and lockwasher.
- Secondary terminals are brass screws No. 10-32 with one flat washer and lockwasher.
- The transformer winding is vacuum encapsulated in polyurethane resin.
- Plated steel mounting base
- For indoor use.


CATALOG NUMBER	PRIMARY VOLTAGE	RATIO	SECONDARY VOLTAGE	FREQUENCY	PRIMARY FUSE
CPT3-60-1.5-242FF	2400V	20:1	120/240V	60Hz	3E
CPT3-60-1.5-332FF	3300V	30:1	110/220V	50Hz	2E
CPT3-60-1.5-4161FF	4160V	34.7:1	120/240V	60Hz	2E
CPT3-60-1.5-482FF	4800V	40.1	120/240V	60Hz	2E
*For fuse clips only, change FF to CC					




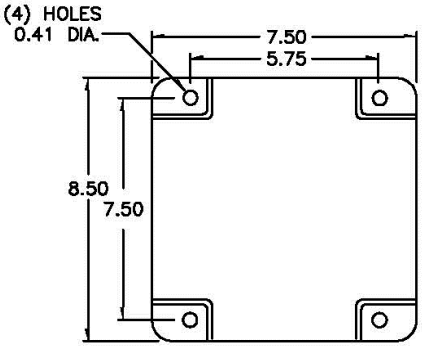

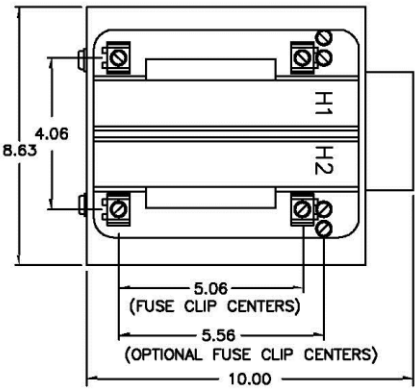

CONNECTION DIAGRAM



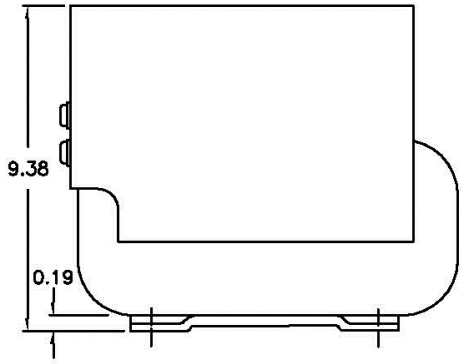

Products are manufactured in a plant whose quality management system has been certified to be in compliance with ISO 9001:2015 by NQA