
Control Power Transformer

Model CPT3-60-2
rev 11132025

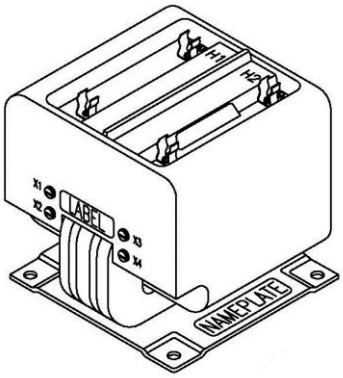

CERTIFICATIONS:

c UL us
E196363

nqa.
ISO 9001
QUALITY MANAGEMENT

APPLICATION:
To provide control power in distribution equipment and motor starters

FREQUENCY:
See below


INSULATION LEVEL:
5 kV, 60 kV BIL. full wave


THERMAL RATING:
At 30°C. amb., see below


APPROXIMATE WEIGHT:
63 lbs.


- Primary terminals are brass screws No. 10-32 with one flat washer and lockwasher.
- Secondary terminals are brass screws No. 10-32 with one flat washer and lockwasher.
- The transformer winding is vacuum encapsulated in polyurethane resin
- Plated steel mounting base
- For indoor use


CATALOG NUMBER	PRIMARY VOLTAGE	RATIO	SECONDARY VOLTAGE	FREQUENCY	THERMAL RATING	PRIMARY FUSE
CPT3-60-2-242FF	2400V	20:1	120/240V	60Hz	2.0kVA	3E
CPT3-60-2-332FF	3300V	30:1	110/220V	50Hz	1.8kVA	2E
CPT3-60-2-4161FF	4160V	34.7:1	120/240V	60Hz	2.0kVA	2E
CPT3-60-2-482FF	4800V	40.1	120/240V	60Hz	2.0kVA	2E
CPT3-60-2-662FF	6600V	60:1	110/220V	60Hz	2.0kVA	1E
CPT3-60-2-722FF	6900V	60.1	120/240V	60Hz	2.0kVA	1E
*For fuse clips only, change FF to CC						



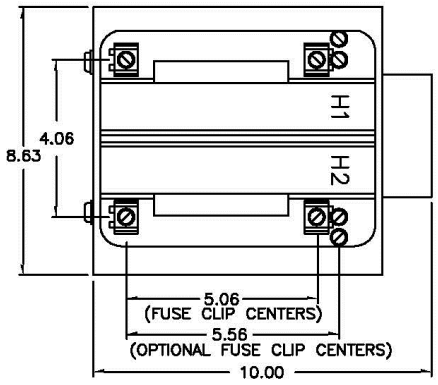



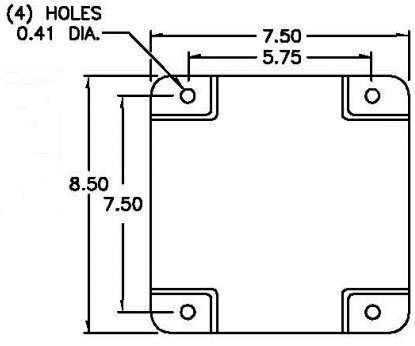

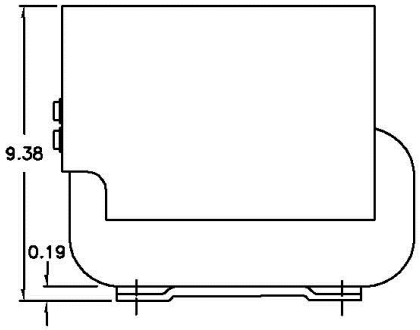

Products are manufactured in a plant whose quality management system has been certified to be in compliance with ISO 9001:2015 by NQA