Control Power Transformer

Model CPT3-60-3
rev 06152026


APPLICATION:
To provide control power in distribution equipment and motor starters

FREQUENCY:
50/60 Hz.

INSULATION LEVEL:
5 kV, 60 kV BIL. full wave

THERMAL RATING:
3 kVA at 30°C. amb.

APPROXIMATE WEIGHT:
85 lbs.

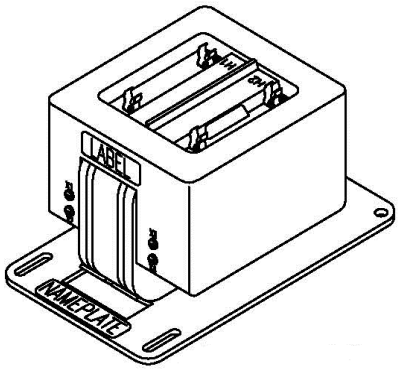


CERTIFICATIONS:


c UL us
E196363


nqa.
ISO 9001
QUALITY MANAGEMENT


CATALOG NUMBER	PRIMARY VOLTAGE	RATIO AT 120 V	SECONDARY VOLTAGE	PRIMARY FUSE
CPT3-60-3-242FF-XXX-6	2400	20:1	120/240	5E
CPT3-60-3-4161-XXX-6	4161	34.6 :1	120/240	3E
CPT3-60-3-482FF-XXX-6	4800	40:1	120/240	3E
CPT3-60-3-502FF-XXX-6	5000	41.7:1	120/240	3E
CPT3-60-3-552FF-XXX-6	5500	45.8:1	120/240	3E
CPT3-60-3-602FF-XXX-6	6000	50:1	120/240	2E
CPT3-60-3-662FF-XXX-6	6600	55:1	120/240	2E
CPT3-60-3-692FF-XXX-6	6900	57.5:1	120/240	2E
For fuse clip only, change FF to CC, Replace -6 with -5 for 110/230 secondary voltages.				

- Primary terminals are brass screws No. 10-32 with one flat washer and lockwasher or HV lead kit shown below.
- Secondary terminals are brass screws No. ¼ - 20 with one flat washer and lockwasher.
- The transformer winding is vacuum encapsulated in polyurethane resin.
- Plated steel mounting base
- For indoor use



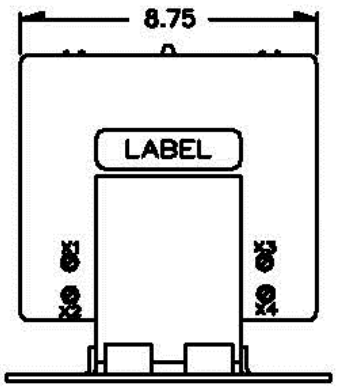

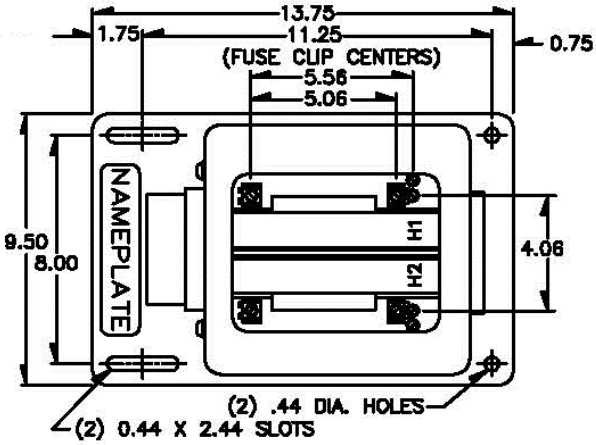

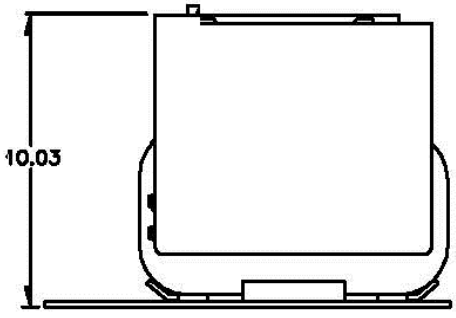

Products are manufactured in a plant whose quality management system has been certified to be in compliance with ISO 9001:2015 by NQA