## TYPE A – Single Throw – Front Connected: 1200 Amp

**Shown as Basic Switch. For options, download Info/Opt.pdf**

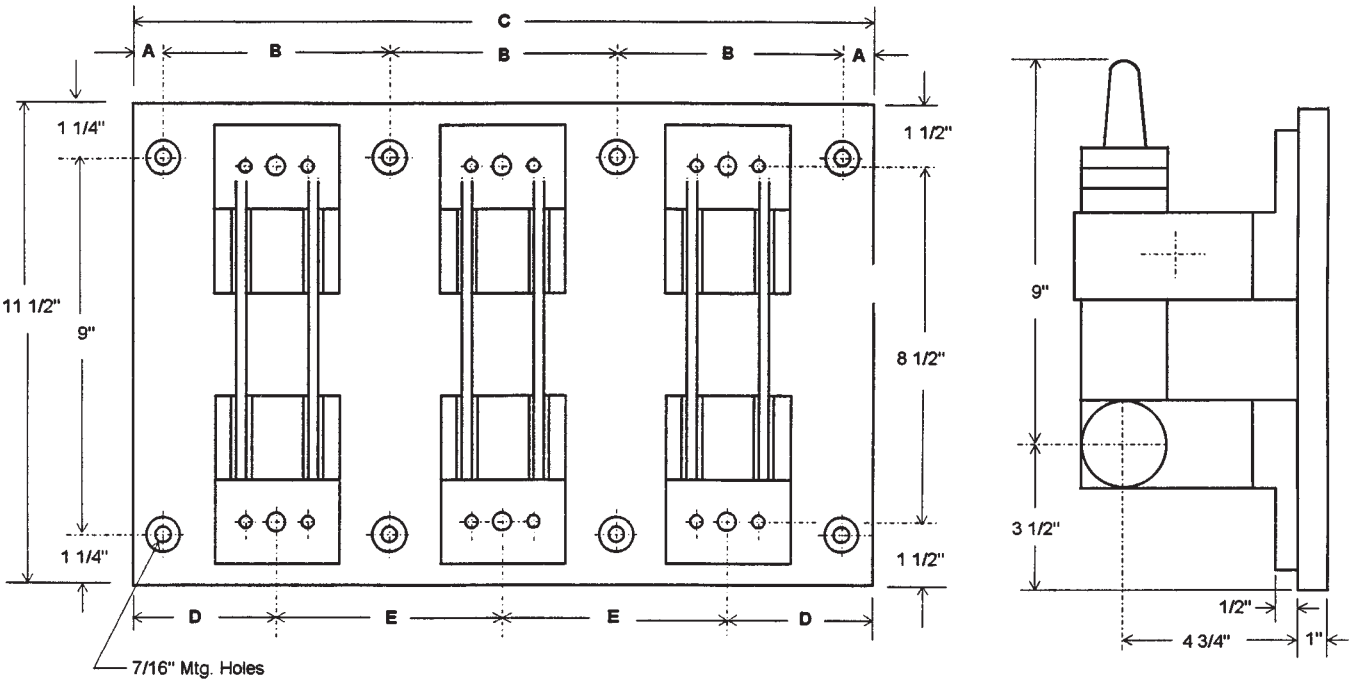


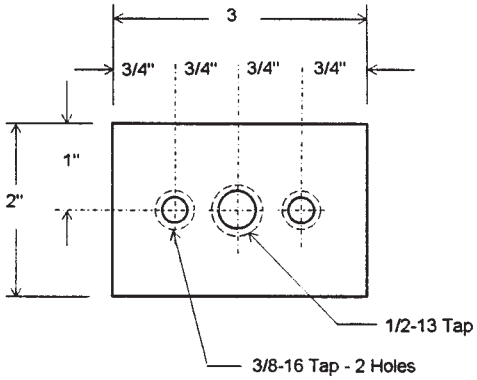


**Customer Connection**

**NOTE: Parts silver plated, insulation red polyglass**

## 1200 AMP — 600 VDC / VAC OR LESS

| POLES | A | B | C | D | E | No. of Mtg. Holes |
|---|---|---|---|---|---|---|
| Single | ¾ | 5½ | 7 | 3½ | — | 4 |
| Two | ¾ | 5½ | 12½ | 3½ | 5½ | 6 |
| Three | ¾ | 5½ | 18 | 3½ | 5½ | 8 |

Crompton Technology Inc.
7536 Bath Road
Mississauga, Ontario L4T 1L2
T (905)671-2304
F (905)671-3661
info@cromptoncanada.com
www.cromptoncanada.com

Tolerances ± .015 for the hole diameters. Other tolerances ± .030 unless specified.
Dimensions subject to change without notice.