


## CURRENT SENSOR

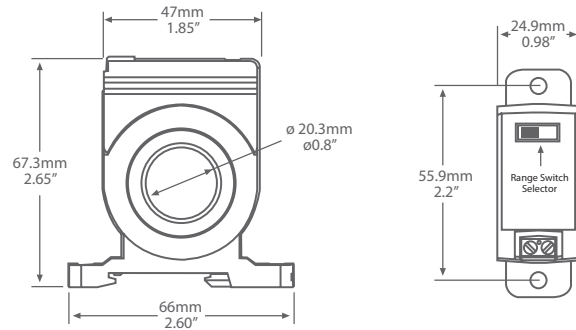

CS-650

### PRODUCT DESCRIPTION

The CS-650 Series current sensors monitor line current for electrical loads such as pumps, conveyors, machine tools, or fans and output a 0-5 Vdc signal to represent the load current.

The CS-650 require no external power as they are totally powered by induction from the AC line being monitored.

The sensors are typically used to monitor motor operation and can be used to determine motor failure, belt loss, machine feed rates or tool wear.

### TYPICAL INSTALLATION


**For complete installation and wiring details, please refer to the product installation instructions.**

The CS-650 series must be mounted in an electrical enclosure and has an integral mounting tab to allow either screw mount to a surface or spring mount to a DIN rail.

The CS-650 series has a 2 wire connection to the Building Automation System.

### SPECIFICATIONS

MEASUREMENT RANGE	<b>CS-650-R1:</b> 0-10/20/50 Amps <b>CS-650-R2:</b> 0-50/100/150 Amps <b>CS-650-200:</b> 0-200 Amps
MAXIMUM INPUT CURRENT	<b>CS-650-R1:</b> 100 Amps continuous <b>CS-650-R2:</b> 150 Amps continuous <b>CS-650-200:</b> 250 Amps continuous
ACCURACY	<b>CS-650-R1/R2:</b> ±2% FSO (5-100% of range) <b>CS-650-200:</b> ±1% FSO (5-100% of range)
SIGNAL OUTPUT	0-5 Vdc
SENSOR POWER	Self-powered
INSULATION CLASS	600 Vac, insulated conductors
FREQUENCY	50/60 Hz
RESPONSE TIME	200 mS typical, 0-90%
OUTPUT LOAD	1 MΩ typical
LOADING ERROR	Add 0.5% error with 100KΩ
OPERATING TEMPERATURE	-15 to 60°C (5 to 140°F)
OPERATING HUMIDITY	5 to 90 %RH non-condensing
TERMINAL BLOCK	14 to 22 AWG
DIMENSIONS	67mm W x 68.9mm H x 24.1mm D (2.65" x 2.7" x 0.95")
SENSOR APERTURE	20.3mm (0.8")
ENCLOSURE MATERIAL	ABS/PC, UL94-V0
AGENCY APPROVALS	cULus listed

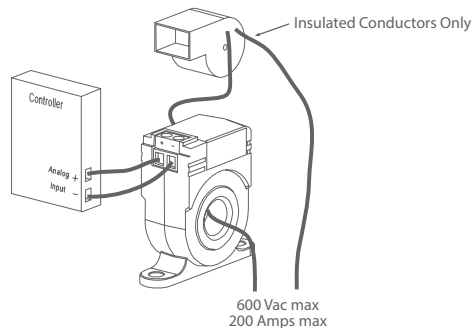

### ORDERING

PRODUCT	<b>CS-650</b> Solid-Core Current Sensor, 0-5 Vdc Output									
SENSING RANGE	<table border="0"> <tr> <td><b>R1</b></td> <td>0-10/20/50 Amps - switch selectable</td> <td>100 Amps Continuous</td> </tr> <tr> <td><b>R2</b></td> <td>0-50/100/150 Amps - switch selectable</td> <td>150 Amps Continuous</td> </tr> <tr> <td><b>200</b></td> <td>0-200 Amps</td> <td>250 Amps Continuous</td> </tr> </table>	<b>R1</b>	0-10/20/50 Amps - switch selectable	100 Amps Continuous	<b>R2</b>	0-50/100/150 Amps - switch selectable	150 Amps Continuous	<b>200</b>	0-200 Amps	250 Amps Continuous
<b>R1</b>	0-10/20/50 Amps - switch selectable	100 Amps Continuous								
<b>R2</b>	0-50/100/150 Amps - switch selectable	150 Amps Continuous								
<b>200</b>	0-200 Amps	250 Amps Continuous								

### PART NUMBER

CS-650